

DRILTEC

PERFORMANCE IN CONCRETE AND STONE





Enhanced emphasis on ergonomics and operator convenience are put to work in the design of DRILTEC drill bits and accessories. To reduce the impact of "hand-arm vibrations" associated with the use of electric rotary hammers, recent design developments for low vibration techniques have been applied.

DRILTEC carbide bits are made to meet PGM standards as they apply to safe drill-hole/anchor connection; geometrically precise holes, to provide for maximum anchor grip and safety.

To optimize performance, DRILTEC rotary hammer accessories are designed to OEM specifications and manufactured with state of the art technologies and materials. Only high grade chrome-nickelmolybdenum steels, computer driven milling stations and most modern vacuum brazing and hardening techniques are applied in the manufacture of DRILTEC carbide bits.

The newly developed **ADX** small diameter SDS-Plus drill bits allow for drilling concrete-embedded rebar and concrete metal deck. In addition, the unique and extremely wear resistant carbide tip design provides for an unsurpassed service life in concrete and stone. ADX drill bits neatly extend the size range of our very successful RL style **RebarCUTTER™** for larger diameter holes.

Under the newly acquired Heller Anchor Bore brand DRILTEC will soon introduce additional rotary hammer accessories to further enhance product mix and market appeal.

CAUTION: Always wear eye, ear, and respiratory protection when using masonry drill bits, chisels, and accessories. Grinding of carbide may produce dust of potentially hazardous ingredient. Consult power tool manufacturer for proper use of tools.

All Prices, Dimensions and Specifications are subject to change without notice!

WARRANTY: All DRILTEC products are warranted agains any defects in material and workmanship. No other warranty is expressed or implied. No warranty is applied or expressed with regard to the fitness of any reconditioned tools, including products reconditioned in accordance to supplied reconditioning instructions.

DRILTEC products are sold through authorized distributors only. This literature was provided by your local authorized **DRILTEC** distributor:

COPY RIGHTS:

DRILTEC, LLC,

THE DRILTEC LOGO, HELLER ANCHOR BORE LOGO, JET-HEAD®. AND BIONIC® ARE TRADEMARKS OF DRILTEC, LLC



PLEASE NOTE: Company names and product names indicated have no affiliation with **DRILTEC**, **LLC** They are used for reference only and are properties/Trademarks of the companies indicated. Company/Model numbers in this brochure are for reference only. ASSOCIATE Subject to change without notice.

TABLE OF CONTENTS

ADAPTER:	Core Bit Adapter, Ratio	15
ADAI TEN.	Cruciform Adapter, Ratio	16
	Snap-Lock Adapter	9
CHISEL:	3/4" HEX Chisel	18
UNIOEL.	1-1/8" Breaker Hammer Chisel	19
	SDS-Max	22
	SDS-Plus	21
	SDS-Top	21
OODE DITO	Spline Shank	20
CORE BITS:	One-Piece	16
ODUIOIEODAA	Ratio Core Bits	15
CRUCIFORM:	Drill Bits and Adapters	16
HEX QUICK CHANGE:	Multi-Purpose Drill Bits NEW	9
MULTI-PURPOSE BITS:	Straight Shank	11
RATIO SYSTEM:	Core Bits	15
	Cruciform Drill Bits	16
	Rebar CUTTER™	14
REBAR CUTTER:	Small Diameters = ADX Drill Bits	3
	Large Diameters = Rebar CUTTER™	14
SDS-MAX:	Adapters Core Bits, Ratio	15
	Cruciform, Ratio	16
	Snap Lock	9
	Chisels	22
	Core Bits One Piece	16
	Ratio	15
	Cruciform Drill Bits	16
	Drill Bits	7
SDS-PLUS:	Adapters Core Bits, Ratio	15
	RebarCUTTER™, Ratio	14
	Snap Lock	9
	ADX small diameter Rebar drill bits	3
	Chisels	21
	Core Bits, Ratio	15
	Drill Bits	5
	Drill Bits Bulk	4
	RebarCUTTER™	14
	Tapcon Drill Bits	17
SDS-TOP:	Adapters Core Bits, Ratio	15
	Cruciform, Ratio	16
	Chisels	21
	Core Bits, Ratio	15
	Cruciform Drill Bits	16
	Drill Bits	6
SAW BLADES:	Carbide Tipped - Wood, Rip & Cross	23
SPLINE SHANK:		15
OF LINE SHANK:		16
	Cruciform, Ratio	-
	Snap Lock	9
	Chisels One Diese	20
	Core Bits One Piece	16
	Ratio	15
	Cruciform Drill Bits	16
OTD 41017	Drill Bits	8
STRAIGHT SHANK:	Heavy Duty - Rotary Percussion	10
	Hex Quick Change Drill Bits NEW	9
	Multi Purpose - Universal Drill Bits	11
	Tile & Marble Drill Bits	12
TAPCON:	Installation Kit & Accessories	17
	SDS-Plus Hex Drill Bits	17
	Straight Shank/Flat	17
TILE BITS:	Straight Shank	12

ADX BITS for drilling Rebar and Metal Deck



For use with SDS-Plus Rotary Hammers



UNINTERRUPTED DRILLING THROUGH CONCRETE AND STEEL...

- Solid-Cross-Configuration of ADX carbide head.
- Firm and secured carbide embedment with flank side reinforcements.
- Generous spiral flute entrance geometry for fast drill dust evacuation.
- Blow-back prevention through sub-trac spiral flute design.
- Noise damping effect due to ADX drillhead design.
- Significantly reduced "arm-handvibration" due to ADX multi-cutter head design.
- Unsurpassed drilling performance in concrete and stone and yes, embedded rebar and metal concrete deck.
- Made in Germany.





Diameter	Use Length	Total Length	Part #
3/16"	4"	6"	ADX006018
1/4"	4"	6"	ADX007029
1/4"	6"	8"	ADX007041
5/16"	4"	6"	ADX011031
5/16"	10"	12"	ADX011049
3/8"	4"	6"	ADX017059
3/8"	10"	12"	ADX017067
1/2"	4"	6"	ADX019073
1/2"	10"	12"	ADX019081
9/16"	4"	6"	ADX021071
9/16"	10"	12"	ADX021087

NOTE: Consult with structural design engineer/architect before drilling rebar!

DRILLING TIPS...

- Consult power tool manual before using Rotary Hammer.
- Assure safe footing and all other safety measures before attempting to use power tool.
- Use Rotary Hammer in <u>hammer drill</u> mode!
- When encountering rebar/steel apply firm steady pressure.

NOTE: Consult with structural design engineer/architect before drilling rebar!

SDS-PLUS DRILL BITS

AEG	B & D	BOSCH	DEWALT	HILTI	HITACHI	KANG0	MAKITA	MILWAUKEE	METAB0	RAMSET
APH14, PH210	5009, 5013	11207, 11210	514K, 523K	TE 1, 2, 5, 6, 7	DH22	200, 285	BRH202, BRH240	5302, 5303	6010, 6011	425
PHE16, PHE19	5014, 5016	11211, 11212	540K, 557K	TE 10,12, 14	DH24	327, 422	HR160, 1821	5312, 5320	6015, 6018	
PHE20, PHE24	5053, 5054	11213, 11215	562K, 563K	TE 15, 16	DH25	426, 430D	HR1830	5324, 5359	6020, 6021	REDHEAD
PHE26	5056, 5057	11221, 11222	565K, 566K	TE 17, 18	H30PV		HR2000, 2010,	5360, 5362	6024, 6026	555, 715
	005K-2	11224, 11225	567K, 568K	TE 24, 25	VR16		HR2400, 2410	5363, 5365	6028	
		11228, 11234	570K, DC232KL	TE 30, TE 40*	VRT22		HR2420, 2431	5366, 5368	BHA18, BHE22	RYOBI
		11236, 11239	DW999K	TE/GP22		PANASONIC	HR2432, 2450	5369, 5383	BHE24, BHE6015	ED160
		11250, 11253	25101, 25103	FEIN		EY6803	HR2455, HR2475	M18, V28	KHE24, KHE28	ED211
		11255, 11258	25113, 25201	642		EY6813	HR2511, HR2811	PORTER CABLE	KHE32	
		11524	25203, 25303	6372		EY7880	HR3210	639	UHE22, UHE28	
			25304, 25313				HR3000C			

*Use with TE-C Connector

SDS-PLUS HIT-PACK

The most commonly used SDS-Plus drill bits conveniently bulk-packed. For the Pro that has to drill many holes of one size. Hit-Packs offer easy handling of drill bits without all the packaging. Hit-Packs can be closed for secure storage.

PRO-PACK SDS-PLUS DRILL BITS

Most popular SDS-Plus drill bits in a convenient pack. Attractively priced.



METRIC SIZES

SDS-PLUS DRILL BITS

In today's changing world many metric anchors have entered the marketplace. To provide the proper metric anchor hole requirement according to ISO standards, DRILTEC offers a new range of metric SDS-Plus drill bits to meet these needs.

Made in Germany.



HITPACK SDS-PLUS

BULK PACK NOT INDIVIDUALLY PACKAGED

DESCRIPTION DIAM. X LENGTH	PART NUMBER	BULK PACK	
5/32 X 6	AD-008-101	12	
3/16 X 4-1/2	AD-012-104	12	
3/16 X 6-1/4	AD-016-215	12	
1/4 X 4-1/2	AD-048-105	12	
1/4 X 6-1/4	AD-052-106	12	
1/4 X 8-1/2	AD-056-218	12	
5/16 X 6-1/4	AD-062-107	6	
3/8 X 6-1/4	AD-080-109	6	
1/2 X 6-1/2	AD-124-114	6	
1/2 X 10	AD-128-115	6	
5/8 X 6-1/2	AD-156-119	3	

SOLD IN QUANTITIES AS INDICATED ONLY!

SDS-PLUS MULTI-PACKS

DESCRIPTION	5 PC.	7 PC.	
DIAM. X LENGTH	AD-901-005	AD-901-007	
3/16 X 4-1/2	-	1	
3/16 X 6-1/4	1	1	
1/4 X 4-1/2	-	2	
1/4 X 6-1/4	1	1	
5/16 X 6-1/4	1	-	
3/8 X 6-1/4	1	1	
1/2 X 6-1/2	1	1	

SDS-PLUS METRIC

		USEABLE		TOTAL	PART	
DIAM.	Х	LENGTH	X	LENGTH	NUMBER	
5 mm	X	100	Х	160	MD-005-160	
6 mm	χ	100	Х	160	MD-006-160	
8 mm	X	100	Х	160	MD-008-160	
10 mm	Х	100	Х	160	MD-010-160	
10 mm	Х	150	Х	210	MD-010-210	
12mm	Х	100	Х	160	MD-012-160	
12mm	Х	150	Х	200	MD-012-200	
14mm	Χ	150	Х	200	MD-014-200	
14mm	Χ	200	Х	250	MD-014-250	
15mm	Х	200	Х	250	MD-015-250	
16mm	Χ	200	Х	250	MD-016-250	
18mm	Х	200	Х	250	MD-018-250	
18mm	Х	250	Х	300	MD-018-300	
20mm	Х	250	Х	300	MD-020-300	
24mm	Х	200	Х	250	MD-024-250	
28mm	Х	200	Х	250	MD-028-250	

SDS-PLUS DRILL BITS

FEATURES & BENEFITS

Sharper cutting edges, with **two center points** for faster and more accurate drilling.

Unique concave carbide tip design, accelerates drilling speed, reduces wear and supports dust removal.



More carbide on both principle cutting edges for superior durability.

A single wide spiral flute reinforces the core of the drill bit, maximizing the power transferred to the carbide tip.



The **smaller spiral flute** allows for the retention of the two wide channels for faster dust removal and reduced spiral

The all **new** special **bead blast technology**

flute wear.

ensures a stronger and highly flexible surface with increased performance and reduced risk of bit breakage.

Made in Germany.





					SINGLE	
		USEABLE		TOTAL	CUTTER	
DIAM.	X	LENGTH	X	LENGTH	BIONIC®	MULTI-CUTTER
5/32	Х	2	X	4-1/4	AD-400-219	-
5/32	Х	4	Χ	6-1/2	AD-405-220	-
3/16	Х	2	X	4-1/2	AD-410-104	-
3/16	Χ	4	X	6-1/4	AD-415-215	-
3/16	Х	7	Χ	9-1/2	AD-420-221	-
3/16	Х	9	Χ	11-1/2	AD-425-216	-
3/16	Χ	13	Χ	16	AD-430-260	-
7/32	Χ	4	Х	6-1/4	AD-435-236	-
7/32	χ	6	X	8	AD-440-237	-
7/32	Χ	9	Χ	11-1/2	AD-445-238	-
7/32	Х	13	Χ	16	AD-450-265	-
1/4	Х	2	Χ	4-1/2	AD-455-105	-
1/4	Χ	4	Χ	6-1/4	AD-460-106	-
1/4	Χ	6	Χ	8-1/2	AD-465-218	-
1/4	Χ	9	Χ	11-1/2	AD-470-183	-
1/4	Χ	13	Χ	16	AD-475-270	-
5/16	Χ	4	Χ	6-1/4	AD-480-107	-
5/16	χ	6	Χ	8-1/2	AD-485-108	-
5/16	Χ	10	Χ	12-1/2	AD-490-222	-
3/8	Χ	4	Χ	6-1/4	AD-495-109	-
3/8	χ	8	Χ	10-1/2	AD-500-110	-
3/8	Χ	10	Χ	12-1/2	AD-505-111	-
3/8	χ	15-1/2	Χ	18	AD-510-112	-
3/8	Χ	19-1/2	Х	22	AD-515-239	-
7/16	χ	4	Χ	6-1/4	AD-520-113	-
7/16	χ	10	Χ	12	AD-525-223	-
1/2	Χ	4	Χ	6-1/2	AD-530-114	-
1/2	χ	8	Χ	10	AD-535-115	-
1/2	χ	10	Χ	12	AD-540-116	-
1/2	χ	15-1/2	Χ	18	AD-545-117	-
1/2	χ	21-1/2	Χ	24	AD-550-240	-
9/16	χ	4	Χ	6-1/2	AD-555-118	-
9/16	Χ	10	Χ	12-1/2	AD-560-228	-
9/16	χ	15-1/2	χ	18	AD-565-229	-
5/8	Χ	4	Х	6-1/2	AD-570-119	-
5/8	χ	7	Χ	9-1/2	AD-575-120	AD-580-320
5/8	χ	10	Χ	12	AD-585-121	AD-590-325
5/8	Χ	15-1/2	Х	18	AD-595-122	AD-600-330
5/8	χ	21-1/2	χ	24	AD-605-241	-
11/16	χ	7	χ	9-1/2	AD-610-123	-
11/16	χ	10	χ	12	AD-615-230	AD-620-345
3/4	χ	7	Χ	9-1/2	AD-625-124	AD-630-350
3/4	χ	10	Х	12	AD-635-125	AD-640-355
3/4	χ	15-1/2	χ	18	AD-645-126	AD-650-360
7/8	χ	7	χ	9-1/2	AD-655-128	AD-660-365
7/8	χ	10	χ	12	AD-665-129	-
7/8	χ	15-1/2	χ	18	AD-670-130	AD-675-375
1	Х	7	χ	10	AD-680-184	AD-685-380
1	Х	15-1/2	Х	18	AD-690-185	AD-695-385
1-1/8	Х	7-1/2	χ	10	AD-700-250	AD-705-390
1-1/8	χ	15-1/2	χ	18	AD-710-255	-

SDS-TOP DRILL BITS

The new striking force from **DRILTEC** for the emerging **SDS-Top** mid range rotary hammers...

SDS-Plus hammers with the ideal drilling range

hammers with the ideal drilling range of 1" to 2" diameter leave a gap from 1/2" to 1". The new SDS-Top hammer generation fills this void...

of 5/32" to 1/2" in diameter and SDS-Max





SDS-TOP

*Use with TE-T Connector
OUG WILL I'L I COLLIDOTOL

one representation generalism and resum
CONNECTOR END
SDS-Max 18 mm ø
SDS-Top 14 mm ø
SDS-Plus 10 mm ø

DRILTEC offers a complete range of drill bits, chisels, core bits and adapters for this new rotary hammer generation.

Limited Drilling

Range

Made in Germany.



Optimum Drilling

Range

Bit Diamete	er X	Useable Length		Total ^X Length	BIT STYLE	PART NUMBER
1/4"	Х	4"	Х	8"	BIONIC®-TWINMAX	DT-011-011
1/4"	Х	8"	Х	12"	BIONIC®-TWINMAX	DT-015-015
5/16"	Х	4"	Х	8"	BIONIC®-TWINMAX	DT-019-019
5/16"	Х	8"	Х	12"	BIONIC®-TWINMAX	DT-023-023
3/8"	Х	4"	Х	8"	BIONIC®-TWINMAX	DT-027-027
3/8"	Х	8"	Х	12"	BIONIC®-TWINMAX	DT-031-031
3/8"	Х	16"	Х	20"	BIONIC®-TWINMAX	DT-035-035
7/16"	Х	8"	Х	12"	BIONIC®-TWINMAX	DT-038-038
1/2"	Х	4"	Х	8"	BIONIC®-TWINMAX	DT-045-045
1/2"	Х	8"	Х	12"	BIONIC®-TWINMAX	DT-049-049
1/2"	Х	16"	Х	20"	BIONIC®-TWINMAX	DT-053-053
1/2"	Х	20"	Х	24"	BIONIC®-TWINMAX	DT-057-057
9/16"	Х	8"	Х	12"	BIONIC®-TWINMAX	DT-063-063
9/16"	Х	16"	Х	20"	BIONIC®-TWINMAX	DT-066-066
5/8"	Х	4"	Х	8"	JET-HEAD®	DT-070-070
5/8"	Х	8"	Х	12"	JET-HEAD®	DT-075-075
5/8"	Х	16"	Х	20"	JET-HEAD®	DT-079-079
11/16"	Х	16"	Х	20"	JET-HEAD®	DT-086-086
3/4"	Х	8"	Х	12"	JET-HEAD®	DT-090-090
3/4"	Х	16"	Х	20"	JET-HEAD®	DT-094-094
7/8"	Х	8"	Х	12"	JET-HEAD®	DT-104-104
7/8"	Х	16"	Х	20"	JET-HEAD®	DT-108-108
1"	Х	8"	Х	12"	JET-HEAD®	DT-118-118
1"	Х	16"	Х	20"	JET-HEAD®	DT-122-122
1-1/8"	Х	12"	Х	16"	JET-HEAD®	DT-132-132
1-1/8"	Х	18"	Х	23"	JET-HEAD®	DT-136-136
1-1/4"	Х	12"	Х	16"	JET-HEAD®	DT-145-145
1-1/4"	Х	18"	Χ	22"	JET-HEAD®	DT-149-149



BIONIC® TIP



JET-HEAD®

SDS-MAX DRILL BITS



B & D	воѕсн	DEWALT	HILTI	HITACHI	MAKITA	METAB0	MILWALKEE	WACKER
5097	11214EVS, 11216	541K	TE-80	DH40MA	HR4000C	6045	5313	EHB-7SM
5099	11223, 11227	545K	TE-F 52, 60	DH40MB	HR4001C	KHE76, 96	5308	EHB11BLM
	11230, 11231	2570K	TE-F 72, 92	DH50MB	HR4010C	KANGO	5314	
	11235, 11240	25600K	TE-Y 54, 55, 56	DH40MR	HR4500C	840M	5315	
	11241, 11245		TE-Y 74, 75, 76	H60HR	HR5001C		5342	
	11263, 11264		TE-Y 70	DH45MR	HR4510C		5346	
					HR4002C			
					HR5210C			

BIONIC®

- Unique concave carbide tip design, accelerates drilling speed, reduces wear and supports dust removal.
- Most rigid joints through copper-silver brazing. Carbide is totally embedded in both sides of the steel body. Super tough TWINMAX™ flute. Fastest and most efficient dust removal. Annealed, shotpeened chrome, nickel, molybdenum steel to prevent premature fatigue failures.
- Industrial finish.
- Bit diameters meet ANSI standard.

JET-HEAD®

- Jet-Head® carbide head for smooth and high performance drilling, with less vibration.
- Center point for easy start up.
- Large relief slots for most efficient dust removal.
- Bits provide for exact round holes.
- Bit diameters meet ANSI standards.

Made in Germany.



DIAM.	х	USEABLE LENGTH	х	TOTAL LENGTH	Single Cutter Bionic®	Jet-Head®
3/8"	Х	7-1/4	Х	13-1/2	SM-015-015	-
1/2"	Х	7-1/4	X	13-1/2	SM-030-030	-
1/2"	X	10-3/4	X	17	SM-045-045	-
1/2"	Х	15	X		SM-060-060	-
1/2"	Х	21-3/4	Х	28	SM-075-075	-
1/2"	Х	30-1/2	Х	36	SM-075-801	-
9/16"	Х	7-1/4	Х	13-1/2	SM-090-090	-
9/16"	Х	15	Х	21-1/2	SM-105-105	-
5/8"	Х	7-1/2	Х	13-1/2		SM-120-120
5/8"	Х	11	Х	17		SM-135-135
5/8"	Х	15-1/4	Х	21-1/2		SM-150-150
5/8"	Х	22	Х	28	Ì	SM-165-165
5/8"	Х	30-1/4	Х	36-1/4	Ì	SM-180-180
11/16"	Х	7-1/2	Х	13-1/2	1	SM-195-195
11/16"	Х	15-1/4	Х	21-1/2	ĺ	SM-210-210
3/4"	Х	7-1/2	Х	13-1/2		SM-225-225
3/4"	Х	11	Х	17		SM-240-240
3/4"	Х	15-1/2	Х	21-1/2		SM-255-255
3/4"	Х	22-1/4	Х	28		SM-270-270
3/4"	Х	30-1/2	Х	36-1/4		SM-285-285
7/8"	Х	8	Х	13-1/4		SM-360-360
7/8"	Х	11-1/2	Х	17		SM-375-375
7/8"	Х	15-3/4	Х	21-1/4		SM-390-390
7/8"	Х	30-3/4	Х	36		SM-405-405
1"	Χ	8	Х	13-1/4		SM-420-420
1"	Χ	11-1/2	Х	17		SM-435-435
1"	Χ	15-3/4	Х	21-1/4		SM-450-450
1"	Χ	30-3/4	Χ	36-1/4		SM-465-465
1-1/8"	Х	11-1/2	Х	17		SM-495-495
1-1/8"	Х	17	Х	22-1/2		SM-510-510
1-1/8"	Х	30-3/4	Х	36-1/4		SM-525-525
1-1/4"	Х	11-1/2	Х	17		SM-540-540
1-1/4"	Х	17-	Х	22-1/2		SM-555-555
1-1/4"	Χ	30-3/4	Χ	36-1/4		SM-570-570
1-3/8"	Х	11-1/2	Х	17		SM-600-600
1-3/8"	Х	17-	Х			SM-615-615
1-3/8"	Х	30-3/4	Х	36-1/4		SM-630-630
1-1/2"	Х	11-1/2	Х	17		SM-690-690
1-1/2"	Χ	17	Х			SM-705-705
1-3/4"	Х	17	Х	22-1/2		SM-745-745
2"	Χ	17	Х	22-1/2		SM-765-765

SPLINE DRILL BITS

AEG	B & D	воѕсн	DEWalt	HITACHI	KANGO	MAKITA	METAB0	MILWAUKEE	RAMSET	RYOBI
PH38	5041, 5042	11202, 11203	530K	DH38YE	430 S, 501 S	HR3851	RH66, RH99	5309, 5311	442, 445	ED382
PHD26	5043, 5044	11204, 11205	531K	DH40FA	637 S, 750 S	HR4040C	1129, 1130	5316, 5317	475	ER382
PHD38	5045, 5059	11209, 11214	532K	DH40FB	950 S, 978 S	HR5000	6030, 6040	5318, 5319	REDHEAD	WACKER
	5093, 5095	11219, 11220	533K	DS50SB			6046	5321, 5341	747-2	EHB 7
	5096, 5098	11232, 11233						5343, 5344		EHB11BLS
		11244E, 11247						5347, 5348		
		11248						5352, 5345		

- Made of chrome-nickel molybdenum steel.
- Pointed carbide tip for easy hole centering and directional guidance.
- Short entries into double spiral flute design for fast dust removal.
- Multi-Cutter design provides for vastly reduced vibration.
- Lower operational noise levels due to multi carbide tip.
- Multi-Cutter design provides for clean round holes.
- All diameters meet current ANSI standards.
- Shot-peened, industrial finish.

Made in Germany.



DIAM.	Х	USEABLE LENGTH	Х	TOTAL LENGTH	SINGLE CUTTER BIONIC®	JET-HEAD®
3/8"	Χ	4	Χ	10	AE-050-131	-
3/8"	Χ	7	Χ	13	AE-055-218	-
1/2"	Χ	4	Χ	10	AE-060-132	-
1/2"	Χ	7	Χ	13	AE-065-219	-
1/2"	Χ	9-1/2	Χ	16	AE-070-133	-
1/2"	Χ	15-1/2	Χ	22	AE-075-217	-
1/2"	Χ	20-1/2	Χ	27	AE-080-134	-
1/2"	Χ	30	Χ	36	AE-085-301	-
9/16"	Χ	7	Χ	13	AE-090-220 *	-
9/16"	Х	15-1/2	Х	22	AE-095-221 *	-
5/8"	Χ	4	Χ	10	AE-300-301 *	AE-305-136
5/8"	Χ	7	Χ	13	AE-310-301	AE-315-222*
5/8"	Χ	9-1/2	Χ	16	AE-320-301	AE-325-137
5/8"	Χ	15-1/2	Χ	22	AE-330-301	AE-335-212
5/8"	Χ	20-1/2	Χ	27	AE-340-301 *	AE-345-138
5/8"	Χ	30	Χ	36	AE-350-301 *	AE-355-228
11/16"	Χ	9-1/2	Χ	16	AE-360-301 *	AE-365-139
3/4"	Χ	4	Χ	10	AE-370-301 *	AE-375-180
3/4"	Χ	7	Χ	13	AE-380-301	AE-385-223*
3/4"	Χ	9-1/2	Χ	16	AE-390-301	AE-395-140
3/4"	Χ	15-1/2	Χ	22	AE-400-301	AE-405-141
3/4"	Χ	20-1/2	Χ	27	AE-410-301	AE-415-142
3/4"	Χ	30	Χ	36	AE-420-301	AE-425-229
7/8"	Χ	4	Χ	10	AE-430-301 *	AE-435-213*
7/8"	Χ	7	Χ	13	AE-440-301 *	AE-445-225*
7/8"	Χ	9-1/2	Χ	16	AE-450-301	AE-455-143
7/8"	Χ	15-1/2	Χ	22	AE-460-301	AE-465-144
7/8"	Χ	30	Χ	36	AE-470-301	AE-475-230
1"	Χ	4	Χ	10	AE-480-301 *	AE-485-214 *
1"	Χ	7	Χ	13	AE-490-301 *	AE-495-226*
1"	Χ	9-1/2	Χ	16	AE-500-301	AE-505-145
1"	Χ	15-1/2	Χ	22	AE-510-301	AE-515-146
1"	Χ	30	Χ	36	AE-520-301	AE-525-231
1-1/8"	Χ	9-1/2	Χ	16	AE-530-301	AE-535-147
1-1/8"	Χ	15-1/2	Χ	22	AE-540-301	AE-545-148
1-1/8"	Χ	30	Χ	36	AE-550-301 *	AE-551-302*
1-1/4"	Χ	9-1/2	Χ	16	AE-555-301	AE-560-149
1-1/4"	Χ	15-1/2	Χ	22	AE-565-301	AE-570-150
1-1/4"	Χ	30	Χ	36	AE-575-301	AE-580-232*
1-3/8"	Χ	9-1/2	Χ	16	AE-585-301 *	AE-590-151
1-3/8"	Χ	15-1/2	Χ	22	AE-595-301	AE-600-152
1-3/8"	Χ	30	Χ	36	AE-605-301 *	AE-610-233*
1-1/2"	Χ	9-1/2	Χ	16	AE-615-301	AE-620-227 *
1-1/2"	Χ	15-1/2	Χ	22	AE-625-301	AE-630-153
1-3/4"	Χ	17	Χ	22-1/2	AE-655-301	AE-660-245
2"	Χ	17	Χ	22-1/2	AE-675-301	AE-680-265
► While Ωus						

★ While Quantities Last

QUICK CHANGE - Carbide Tipped Drill Bits

TCC005-005 Hex Quick Change Multi-Purpose Bit - 5 Pack





DESIGN:

- ANSI carbide tip diameters
- 1/4" hex bit drive
- High temperature brazing 1,120° C
- Milled flute for optimized dust removal
- Asymetric spiral shape
- Straight flute entry
- Grey surface blast
- Made in Germany

CONTENTS: 1 PIECE EACH

Diameter	х	Useable Length	х	Total Length
1/8"	Х	1-1/2"	Х	3"
5/32"	Х	1-3/4"	Х	3-1/2"
3/16"	Х	2"	Х	3-7/8"
1/4"	Х	2-1/2"	Х	4"
5/16"	Х	2-3/4"	Х	4-3/4"

APPLICATION:

- · Concrete, Masonry, Brick
- Wood
- Acrylics
- Soft Tile



SNAP-LOCK ADAPTER

SDS-PLUS **ADAPTER**

DESCRIPTION	PART #
SPLINE SHANK	AH-222-222
SDS-Top	AH-222-225
SDS-Max	AH-230-230
WACKER HEX	AH-245-245★

★ While Quantities Last

SDS-MAX / SPLINE SHANK ADAPTER

DESCRIPTION	PART #
SPLINE to SDS-MAX BITS	AH-223-223
SDS-MAX to SPLINE BITS	AH-231-231

For drilling small diameter holes with SDS-Plus drill bits. Maximize use range of large capacity Rotary Hammers.



drill bits in SDS-Max Rotary Hammers and visa versa. Optimize usage of drill bit inventory.


STRAIGHT SHANK DRILL BITS

- Award winning performance.
- Probably the best performing Rotary Percussion drill bit in the market today.
- Chrome-nickel-molybdenum steel, same as used in rotary hammer bits.
- Tungsten Carbide tips.
- Unique carbide tip angle, for highest drilling speeds and durability.
- Copper-silver brazing joints, for ultimate caribde tip embedment.
- Straight spiral flute entrance, for a speedy dust removal to ensure fast drilling speeds.
- Industrial finish.
- Drill bit diameters meet ANSI. Standards.

Made in Germany.



DIAM. x TOTAL LENGTH	SHANK	PART NUMBER
1/8 x 2-1/2	1/8"	AS-003-003
1/8 x 6	1/8"	AS-003-009
5/32 x 6	5/32"	AS-004-009
3/16 x 3-1/2	3/16"	AS-006-006
3/16 x 6	3/16"	AS-009-009
7/32 x 6	7/32"	AS-011-015
1/4 x 4	1/4"	AS-012-012
1/4 x 6	1/4"	AS-015-015
1/4 x 13	1/4"	AS-018-018
1/4 x 18	1/4"	AS-019-019
5/16 x 4	5/16"	AS-021-021
5/16 x 6	5/16"	AS-024-024
5/16 x 13	5/16"	AS-027-027
3/8 x 6	3/8"	AS-030-030
3/8 x 13	3/8"	AS-033-033
3/8 x 18	3/8"	AS-036-036
3/8 x 24	3/8"	AS-039-039
1/2 x 6	3/8"	AS-042-042
1/2 x 13	3/8"	AS-045-045
1/2 x 18	3/8"	AS-048-048
1/2 x 24	3/8"	AS-051-051
9/16 x 6	3/8"	AS-052-052
5/8 x 6	3/8"	AS-054-054
5/8 x 8	3/8"	AS-056-056
5/8 x 13	3/8"	AS-057-057
5/8 x 18	3/8"	AS-058-058
3/4 x 6	1/2"	AS-060-060
3/4 x 13	1/2"	AS-063-063
7/8 x 6	1/2"	AS-066-066
7/8 x 13	1/2"	AS-069-069
1" x 6"	1/2"	AS-072-072
1" x 13"	1/2"	AS-075-075






METRIC STRAIGHT SHANK

DIAM. x Total Length (in mm)	SHANK (in mm)	PART NUMBER
4 x 85	4	MA-004-085
5 x 85	5	MA-005-085
5 x 150	5	MA-005-150
6 x 100	5	MA-006-100
6 x 150	5	MA-006-150
8 x 150	8	MA-008-150
8 x 200	8	MA-008-200
10 x 200	10	MA-010-200
12 x 150	10	MA-012-150
14 x 200	10	MA-014-200

SC MULTI-PURPOSE DRILL BITS



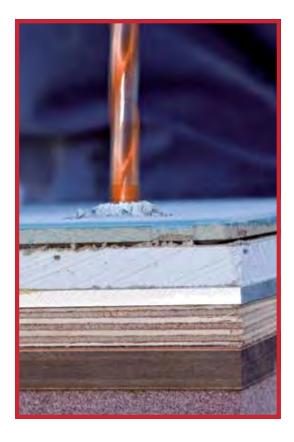

- Titanium Carbide Tip
- Special Cutting Edge Geometry
- Diamond-Ground Cutting Surface
- Made in Germany.



SC Drill Bits, suitable to drill almost any material.

PART NUMBER	DIAMETER	TOTAL LENGTH
SC-003-015	1/8"	3"
SC-008-030	5/32"	6"
SC-013-016	3/16"	3-1/2"
SC-013-030	3/16"	6"
SC-018-017	1/4"	4-1/4"
SC-018-030	1/4"	6"
SC-023-030	5/16"	6"
SC-028-028	3/8"	5-1/4"
SC-033-030	1/2"	6"
SC-038-030	5/8"	6"
SCC-005-005	5 pc. Set, one each: SC-003-015, SC-018-017, SC-023-030	SC-008-030, SC-013-016,

Recommended drilling speed:

P	Concrete, Brick, Stone
	Granite, Marble
	Soft Wood
	Hard Wood
	Steel, Cast Iron
	Plastic, Acrylic
	Glass, Crystal
	Ceramics, Ceramic Tile




	Drill Bit Diameter							
		1/8-3/16"	1/4"	5/16"	3/8"	1/2"	9/16"	5/8"
	400							
	600							
	800							
	1.000							
	1.200							
PM	1.400							
~	1.600		\setminus					
	1.800							
	2.000							
	2.200							
	2.500							

HT DRILL BITS for drilling Tile, Marble, Porcelain, Ceramics, etc.










The **Polygonal** shape assures:

- Unmatched chuck security
- Virtual self-chucking
- No chuck slippage
- Quick bit change
- Optimal torsion rigidity
- · Low hole/wall friction to boost drilling performance

Made in Germany.



Bits with extremely hard and sharp TSM carbide tip technology make it possible to drill even the hardest materials up to scratch hardness of 9.



PART NUMBER	DIAMETER	TOTAL LENGTH
HT-005-005	1/8"	3"
HT-010-010	5/32"	4"
HT-015-015	3/16"	4"
HT-020-020	1-4"	4"
HT-025-025	5/16"	4-3/4"
HT-030-030	3/8"	4-3/4"
HT-033-033	1/2"	6"

- Titanium Tungsten TSM Carbide. 110° tip angle.
- · Straight flute entry.
- 1,120° Low-stress high temperature brazing.
- Asymmetric spiral flute.
- Highest quality steel.
- Surface hardened.
- Use in Rotary mode only!
- Tile: 1200-600 rpm
- Glass: 800-400 rpm Small diameters use higher rpm. Large diameter use lower rpm.
- Apply high contact pressure if necessary.
- Allow for 20 seconds cooling time between holes for longer bit life.
- For use in all materials up to scratch hardness of 9.





RebarC*UTTER*TM

For use with SDS-Plus Rotary Hammers

The Revolution in Cutting Concrete Embedded Rebar!

- Uniquely durable and aggressive carbide tips.
- Use with engaged hammer action; Continuous drilling without change of drill mode!
- Integrated ejection support for removal of reinforcement from drill body.



Made in Germany.



DIAM.	Х	USEABLE LENGTH	REBAR-CUTTER Description	PART Number
1/2"	х	7-1/2"	Ratio Rebar Cutter	RL-050-190
1/2"	Х	16"	Ratio Rebar Cutter	RL-050-420
9/16"	Х	7-1/2"	Ratio Rebar Cutter	RL-056-190
9/16"	Х	16"	Ratio Rebar Cutter	RL-056-420
5/8"	Х	7-1/2"	Ratio Rebar Cutter	RL-063-190
5/8"	Х	16"	Ratio Rebar Cutter	RL-063-420
11/16"	Х	7-1/2"	Ratio Rebar Cutter	RL-069-190
11/16"	Х	16"	Ratio Rebar Cutter	RL-069-420
3/4"	Х	7-1/2"	Ratio Rebar Cutter	RL-075-190
3/4"	Х	16"	Ratio Rebar Cutter	RL-075-420
7/8"	Х	7-1/2"	Ratio Rebar Cutter	RL-088-190
7/8"	Х	16"	Ratio Rebar Cutter	RL-088-420
1"	Х	7-1/2"	Ratio Rebar Cutter	RL-100-190
1"	Х	16"	Ratio Rebar Cutter	RL-100-420
1-1/8"	Х	7-1/2"	Ratio Rebar Cutter	RL-113-190
1-1/8"	Х	16"	Ratio Rebar Cutter	RL-113-420
1-1/4"	Х	7-1/2"	Ratio Rebar Cutter	RL-125-190
1-1/4"	Х	16"	Ratio Rebar Cutter	RL-125-420
SDS Plus Ada	pter			RA-030-030


- 1. Drill with regular rotary hammer drill bit until rebar is encountered. Stop drilling. Remove drill bit. Do not clean hole, as drill bit dust will aid in drilling rebar with **RebarCutter**™.
- 2. For drilling through rebar insert **Rebar**Cutter[™] into rotary hammer. Use rotary **hammer** mode. Apply firm pressure. When finished remove **Rebar**Cutter[™].
- 3. Continue drilling with regular rotary hammer drill bit.



The use of **Rebar**Cutter™ in SDS-Max or Spline hammers voids all warranties.

RATIO CORE BITS



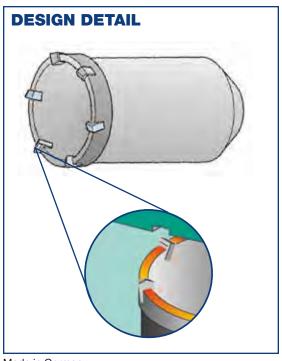

Made in Germany

Made in Germany.

ITEM	DESCRIPTION	DIAMETER X USEABLE LENGTH	PART NUMBER
CORE BITS	(Ratio-Thread) Use with "RA" Adapter and "RP-225-255" Pilot Bit For deeper holes use "RE-300-300 & RE-450-450" Extension only	1-1/2" x 3" 2" x 3" 2-1/2" x 3" 3" x 3" 3-1/2" x 3" 3-3/4" x 3" 4" x 3" 4-1/2" x 3" 5" x 3" 6" x 3"	RK-150-150 RK-200-200 RK-250-250 RK-300-300 RK-350-350 RK-375-375 RK-400-400 RK-450-450 RK-500-500 RK-600-600
ADAPTER	(Ratio-Thread) Spline Shank SDS-Max SDS-Top SDS-Plus Kango Hex Wacker Hex	2" 2" 2" 2" 2" 2"	RA-010-010 RA-020-020 RA-025-025 RA-030-030 RA-040-040 * RA-050-050 *
Extension	(with Ratio Coupler) 11" Extension 18" Extension	11" 18"	RE-300-300 RE-450-450
PILOT BIT	Ratio Core Bits Only!	11/16" x 6"	RP-255-255
COUPLER	Ratio replacements	N/A	RT-001-001

★ While Quantities Last

NEW CORE BIT DESIGN

Radical new design. Enhanced for increased carbide embodiment. Reduced body to drilling diameter decreases hole wall friction. Unique new carbide composition and tip shape. Sturdy high-grade chrome molybdenum steel body. This new core bit design will maximize drilling speed and tool life up to 30% over other systems. Integration with the Ratio-System provides for fantastic system flexibility.

The alternating pointed chisel carbide teeth and the spade carbide teeth are designed to optimize and enhance each other during the drilling operation. The chisel tips score and break-up the materials as well as stabilize the core bits' working characteristics. The spade tips further break and remove the materials. Even problems associated with drilling re-enforced concrete are greatly reduced with this new bit design.







RATIO CORE BIT (SHOWN WITH PILOT)

EXTENSION

ADAPTER

RATIO CRUCIFORM DRILL BITS

ITEM	DESCRIPTION	DIAMETER x USEABLE LENGTH	PART Number
ADAPTER (Ratio-Thread)	Spline Shank SDS-Max SDS-Top Kango Hex Wacker Hex	2" 2" 2" 2" 2"	RA-010-010 RA-020-020 RA-025-025 RA-040-040 * RA-050-050 *
CRUCIFORM DRILL HEAD To be used with: For deeper holes:	"RA" Adapter and "RP" Pilot Bits use "RE" Extensions and "RF" Spiral Flutes if necessary	1-1/2" x 1-1/2" 1-3/4" x 1-1/2" 2" x 1-1/2" 2-5/8" x 1-1/2" 3-1/8" x 1-1/2" 3-1/2" x 1-1/2"	RC-040-040 RC-045-045 RC-052-052 RC-065-065 RC-080-080 RC-090-090
		4" x 1-1/2" 4-1/2" x 1-1/2" 5" x 1-1/2" 6" x 1-1/2" **Not for use with	RC-100-100" RC-110-110" RC-125-125" RC-150-150"
EXTENSIONS	With Ratio Coupler	11" long 18" long	RE-300-300 RE-450-450
SPIRAL FLUTE	For use with applicable Cruciform Drill Head Diameter	1-1/2" X 4-1/2" 1-3/4" X 4-1/2" 2" X 4-1/2" 2-5/8" X 4-1/2" 3-1/8" X 4-1/2" 3-1/2" X 4-1/2"	RF-045-157 RF-045-157 RF-052-157 RF-065-157 RF-080-157 RF-080-157
PILOT BITS	For use with Cruciform Drill Head, normal use. Like above, drilling deep without flute for guide, also angle drilling	5/8" x 4-3/4" 5/8" x 6-3/4"	RP-124-124 RP-174-174
COUPLER While Quantities Last	Ratio replacements		RT-001-001



ONE PIECE CORE BITS

		Useable Length	Х	Total Length	Spline Part #	SDS-Max Part #
1-3/4"	Х	3"	Х	12"	CB-100-175	CB-300-175
1-3/4"	Х	3"	Х	22"	CB-105-175	CB-305-175
2"	Χ	3"	Х	12"	CB-110-200	CB-310-200
2"	Χ	3	Х	22"	CB-115-200	CB-315-200
2-3/4"	Х	3"	Х	12"	CB-120-250	CB-320-250
2-3/4"	Χ	3"	Х	22"	CB-125-250	CB-325-250
3-1/4"	Χ	3"	Х	12"	CB-130-300	CB-330-300
3-1/4"	Χ	3"	Х	22"	CB-135-300	CB-335-300
3-1/2"	Χ	3"	Х	12"	CB-140-350	CB-340-350
3-1/2"	Χ	3"	Х	22"	CB-145-350	CB-345-350
4"	Χ	3"	Х	12"	CB-150-400	CB-350-400
4"	Χ	3"	Х	22"	CB-155-400	CB-355-400
4-1/2"	Χ	3"	Х	22"	CB-165-450	CB-365-450
5"	Χ	3"	Х	22"	CB-175-500	CB-375-500
6"	Х	3"	Х	22"	CB-185-600	CB-385-600
Replace	men	t Pilot Bit			CB-985-900	CB-985-900

NEW CORE BIT DESIGN

Radical new design. Enhanced for increased carbide embodiment. Reduced body to drilling diameter decreases hole wall friction. Unique new carbide composition and tip shape. Sturdy high grade chrome molybdenum steel body. This new core bit design will maximize drilling speed and tool life up to 30% over other sytems.

The alternating pointed chisel carbide teeth and the spade carbide teeth are designed to optimize and enhance each other during the drilling operation. The chisel tips score and break up the materials as well as stabilize the core bits' working characteristics. The spade tips further break and remove the materials. Even allows for drilling reinforced concrete. Use **RebarCUTTER™** for smaller diameters. See page 14 for details.

Made in Germany.



TAPCON® TOOLS

Ideal for drilling and fastening with just one power tool.



- Sturdy and complete set of tools for concrete screw installation. Tapcon and others.
- Use Straight Shank bits with drill bit holder for use in drills with Jacobs-Style chucks.
- SDS-Plus bits fit directly into SDS-Plus Rotary Hammers. Sleeve will tightly fit over hex on drill bit.
- Check with screw manufacturers manual for proper screw installation.
- Drill bits are sold seperately.



DESCRIPTION	PART NUMBER
TAPCON KIT (COMPLETE W. BELOW)	TP-001-001
1/4 MAGNETIC DRIVER	TP-003-003
5/16 MAGNETIC DRIVER	TP-006-006
PHILLIPS BIT ADAPTER	TP-009-009
DRILL BIT HOLDER	TP-012-012
SLEEVE	TP-015-015
1/8 HEX KEY	TP-018-018
# 2 PHILLIPS BIT	TP-021-021
# 3 PHILLIPS BIT	TP-024-024
CASE (ONLY)	TP-000-000



TAPCON® STRAIGHT SHANK BITS

DIAM. x TOTAL LENGTH	PART NUMBER	PACK QTY.
5/32 x 3-1/2	TA-010-001	10
5/32 x 4-1/2	TA-020-002	10
5/32 x 5-1/2	TA-030-003	10
3/16 x 3-1/2	TA-040-004	10
3/16 x 4-1/2	TA-050-005	10
3/16 x 5-1/2	TA-060-006	10
3/16 x 6-1/2	TA-070-007	10



TAPCON® SDS-PLUS HEX BITS

DIAM. x USE/TOTAL LENGTH	PART NUMBER
5/32 x 3 x 6	TS-002-002
5/32 x 4 x 7	TS-003-003
3/16 x 3 x 6	TS-005-005
3/16 x 4 x 7	TS-006-006




® Tapcon is a registered trademark of ITW Buildex.

CHISEL ADVANTAGE MEASURABLE CHISEL QUALITY

Finest workmanship combined with the most modern forging technology are put to work in the manufacture of DRILTEC chisels. CNC machines and robot-aided workstations support manufacturing processes.

DRILTEC chisel quality is "produced" with "in-process-quality-assurance" throughout the manufacturing cycle. Raw material and material composition verficiations, hardening-, form- and dimensional checks are all part of this "in-process-quality-assurance" program. ISO certification of the manufacturing plant is further evidence of this quality assurance package.







Checking for hairline cracks.






Special tool control for blade hardness.



3/4" HEX CHISELS

BOSCH	DEWALT	HITACHI	MAKITA	MILWAUKEE	WACKER
11301	5021K	H55SC	HM1211B	5335	EH9BL
11302	25941K			5337	EHB10
11305	DW558K				
11317					

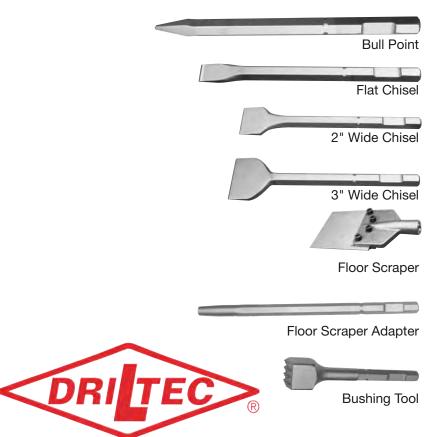

DESCRIPTION	PART #		
12" BULL POINT	AG-400-400		
12" FLAT	AG-406-406		
2" X 12" WIDE	AG-412-412		
3" X 12" WIDE	AG-418-418		
CLAY SPADE 4" x 5" x 16"	AG-420-420 ★		
FLOOR SCRAPER 6" x 5"	AG-310-340		
FLOOR SCRAPER ADAPTER 14" x 16"	AG-441-441 *		
BUSHING TOOL	AG-450-450		


★ While Quantities Last

ELECTRIC HAMMER CHISELS

DRILTEC ELECTRIC HAMMER CHISEL'S SIMPLY THE BEST! HERE'S WHY:

- Manufactured from highest grade chrome, nickel, molybdenum steel.
- Forged points (no grinding) provide for an even horizontal grain structure, resulting in much longer tool service life.






- CNC machined tool connectors for tied tool fit. For benefit of tool and increased performance.
- Case hardened with shot peened surface treatment to prevent premature fatigue failure.

1-1/8" x 6" HEX CHISELS

B&D	BOSCH	DEWALT	HILTI	HITACHI	KANGO	MAKITA	MILWAUKEE	WACKER
5027	Brute	D25980K	TE-3000	H65	2500	HM1303/04B	5338	EH27
	11304			H85		HM1317CB		BH23
	11335			H90		HM1500		
	2760					HM1800/10		

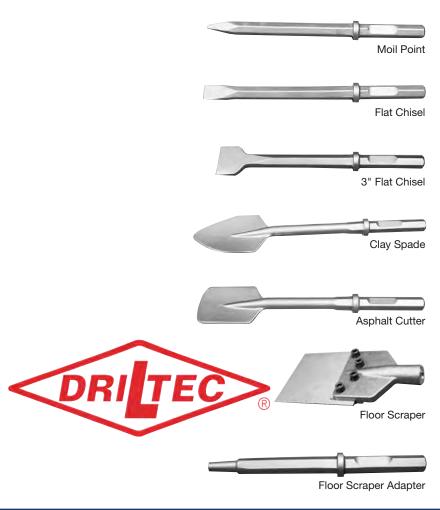


DESCRIPTION	PART #
20" MOIL POINT	AG-705-705
20" FLAT CHISEL	AG-715-715
3" FLAT CHISEL	AG-725-725
5-1/2" x 6" CLAY SPADE	AG-745-745 *
4-1/2" x 5" ASPHALT CUTTER	AG-735-735
6" x 5" FLOOR SCRAPER	AG-310-340
FLOOR SCRAPER ADAPTER 14" x 16"	AG-741-741 *

★ While Quantities Last

SPLINE CHISELS

AEG	B & D	воѕсн	DEWALT	HITACHI	KANGO	MAKITA	METAB0	MILWAUKEE	RAMSET	RYOBI
PH38	5041, 5042	11202, 11203	530K	DH38YE	430 S, 501 S	HM0810B	RH66, RH99	5309, 5316	442, 445	ED382
PHD26	5043, 5044	11204, 11205	531K	DH40FA	637 S, 750 S	HM1242C	1129, 1130	5317, 5318	475	ER382
PHD38	5045, 5059	11209, 11214	532K	DH40FB	950S	HR3851	6030, 6040	5319, 5321	REDHEAD	
	5093, 5095	11219, 11220	533K	DH50SB	978 S	HR4040C	6046	5327, 5334	747-2	WACKER
	5096, 5098	11232, 11233	551K	DH65		HR5000		5336, 5340		EHB 7S
		11244E, 11247		H45FR				5341, 5343		EHB 11BLS
		11248, 11306		H45SB				5344, 5345		
	·	11307, 11310						5347, 5348		
		11314, 11387						5352, 5353		

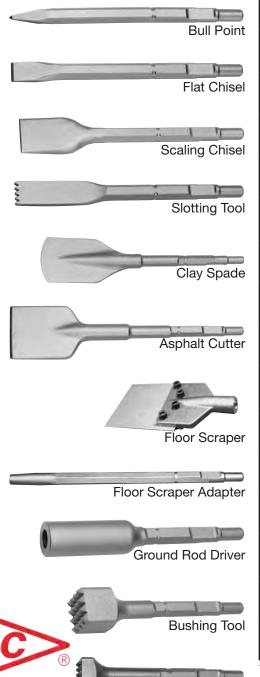


Bushing Tool, Carbide

DESCRIPTION	PART #
BULLPOINT 12"	AG-110-192
BULLPOINT 16"	AG-115-193
FLAT CHISEL 12"	AG-120-190
FLAT CHISEL 16"	AG-125-191
SCALING CHISEL 2" x 12"	AG-130-195
SCALING CHISEL 3" x 12"	AG-135-198
SLOTTING TOOL 1-1/2" x 12"	AG-140-209
CLAY SPADE 4" x 5" x 19"	AG-145-215
ASPHALT CUTTER 5" x 5" x 19"	AG-150-220
FLOOR SCRAPER 6" x 5"	AG-310-340
FLOOR SCRAPER ADAPTER 14" x 16"	AG-165-341
GROUND ROD DRIVER 5/8" x 10"	AG-155-231
GROUND ROD DRIVER 3/4" x 10"	AG-160-232
BUSHING TOOL 1-3/4" x 1-3/4" x 9"	AG-170-350
BUSHING TOOL CARBIDE	AG-175-351 *
★ While Quantities Last	

SDS-PLUS CHISELS

AEG	B & D	воѕсн	DEWALT	HILTI	HITACHI	KANGO	MAKITA	MILWAUKEE	МЕТАВО	RAMSET
APH14, PH210	5009, 5013	11207, 11210	514K, 523K	TE 6C	DH22	200, 285	HR160, HR1821	5302, 5303	6010, 6018	425
PHE16, PHE19	5014, 5016	11211, 11212	557K, 566K	TE 6S	DH24	327, 422	HR2000, HR2010	5312, 5320	6020, 6024	
PHE20, PHE24	5053, 5054	11213, 11215	567K, 570K	TE 7	DH30PV	426, 430D	HR2400, HR2410	5324, 5359	6026	REDHEAD
PHE26	5056, 5057	11221, 11222	25103, 25201	TE 15C	VR16		HR2420, HR2432	5360, 5363	KHE24	555, 715
		11224, 11228	25203, 25303	TE 16	VRT22		HR2450, HR2455	5369	KHE28	
	FEIN	11236, 11253	25304, 25113	TE 24, 25			HR2475, HR2511M	V28	KHE32	RYOBI
	642	11255, 11320	25313	TE 40*			HR2811F, HR3000C	PORTER CABLE	UHE22	ED160
	6372			TE 104			HR3210C, BRH240	639	UHE28	ED211


PLEASE NOTE: HAMMERS WITH NO ROTATION STOP REQUIRE ADAPTER Use with TE-C Connector

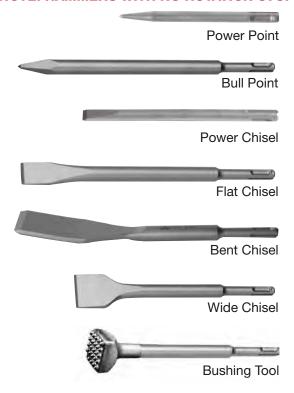

DESCRIPTION	PART #
POWER POINT 6-1/4"	AG-600-600 NEW
BULLPOINT 10"	AG-603-603
POWER CHISEL 6-1/4"	AG-604-604 NEW
FLAT CHISEL 10"	AG-606-606
BENT CHISEL 1-1/2" X 10"	AG-610-610 NEW
WIDE CHISEL 1-1/2" x 10"	AG-609-609
BUSHING TOOL Carbide Tipped	AG-690-371 NEW



SDS-TOP CHISELS




HILTI				
TE35, TE40*, TE46				
*Use with TE-T Connector				

DESCRIPTION	PART #
BULLPOINT 11"	AG-003-003
FLAT CHISEL 11"	AG-006-006
WIDE CHISEL 1-1/2" X 10"	AG-009-009
WIDE CHISEL 2-1/4" X 10"	AG-011-011 *

★ While Quantities Last

SDS-MAX CHISEL

B & D	воѕсн	DEWALT	HILTI	HITACHI	MAKITA	METAB0	MILWALKEE	WACKER
5097	11214 EVS, 11216	541K	TE-F 52, 60	DH40MA	HM1100C	6045	5308	EHB-7SM
5099	11223, 11227	545K	TE-F 72, 92	DH40MB	HM1202C	MHE56	5313	EHB11BLM
	11230, 11231	25600K	TE-Y 54, 55, 56	DH50MB	HR4000C	KHE76	5314	EH9BLM
	11235, 11240	25900K	TE-Y 74, 75	H45MA	HR4001C	KHE96	5315	
	11241, 11245	2570K	TE 76, 80	H60MB	HR4010C		5327	
	11263, 11309	25899K	TE-Y 504, 505	DH40HR	HR4500C		5346	
	11311, 11312	25901K	TE-Y 704, 705, 706	H45MR	HR5001C		5336	
	11313, 11316	25941K	TE-Y 70	H60MR	HR1214C		5339	
	11318, 11388				HR4510C		5342	
	11264				HR5210C			
					HR4002			

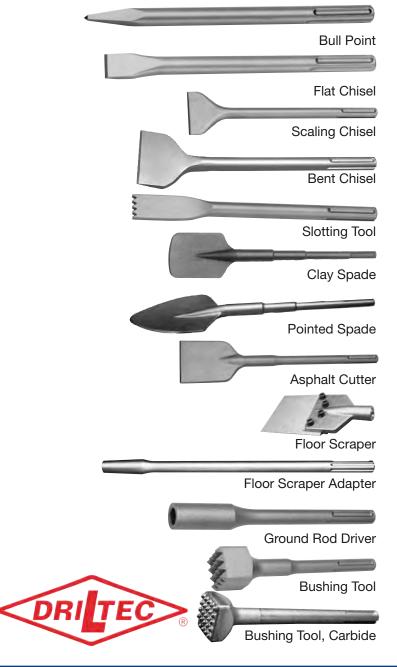

DESCRIPTION	PART #
BULLPOINT 11"	AG-230-203
BULLPOINT 16"	AG-235-204
FLAT CHISEL 11"	AG-240-205
FLAT CHISEL 16"	AG-245-206
SCALING CHISEL 2" X 12"	AG-250-210
SCALING CHISEL 2" X 16"	AG-255-207
SCALING CHISEL 3" X 12"	AG-260-208
BENT CHISEL 3" X 12"	AG-261-211 NEW
SLOTTING TOOL 1-1/4" X 12"	AG-265-209
CLAY SPADE 4-1/2" X 5" X 19"	AG-270-215
POINTED SPADE 5" X 21"	AG-271-218 NEW
ASPHALT CUTTER 5" X 5" X 19"	AG-275-220
FLOOR SCRAPER 6" X 5"	AG-310-340
FLOOR SCRAPER ADAPTER 14" X 16"	AG-285-341
GROUND ROD DRIVER 5/8" X 10"	AG-280-231
GROUND ROD DRIVER 3/4" X 10"	AG-280-232
BUSHING TOOL 1-3/4" X 1-3/4" X 9"	AG-290-370
BUSHING TOOL CARBIDE	AG-290-371

TUNGSTEN CARBIDE TIPPED

SAW BLADES

These fine tungsten carbide tipped saw blades have Roll-Hardened steel body and 0.090 thin kerf. Carbide tipped teeth are alternate top bevel grind. Arbor is 5/8" and have diamond knockout with 7-1/4" blades.

CAUTION: Refer to your power tool manual for proper use and installation. Improper use and or installation may result in bodily injury.

SUPER FAST, SMOOTH CUTS

24 Teeth

Rip/Cross Cut - Wood Alternating Top Bevel Carbide Tipped Fits 5/8" Arbor Saws Kerf .070 - .074 Body .05

Red Cheetah

MAX RPM 8,400

WARNING DO NOT OPERATE SAW MACHINE WITHOUT PROPER SAW BACHINE WITHOUT PROPER SAW BACHINE WITHOUT PROPER SAW BACHINES AND WARNINGS REGARDING YOUR SAFETY ARE CONTAINED IN SAW MACHINES OWNERS MANUAL WEAR EYE AND RESPIRATORY PROTECTION. PALLURE TO HEED THESE INSTRUCTIONS AND WARNINGS COULD RESULT IN SERIOUS BODILY INJURY

Ultra Thin Red Cheetah Saw Blade

Rip/Cross Cut - Wood Alternating Top Bevel Carbide Tipped Fits 5/8" Arbor Saws Kerf 0.090

MAX RPM 7,500

WARNING DO NOT OPERATE SAW MACHINE WITHOUT PROPER SAW BLADE GUARD IN PLACE. OTHER IMPORTANT INSTRUCTIONS AND WARNINGS REGARDING YOUR SAFETY ARE CONTAINED IN SAW MACHINES OWNERS MANUAL. WEAR EYE PROTECTION. FAILURE TO HEED THESE INSTRUCTIONS AND WARNINGS COULD

OIRECTION OF ROTATION

TUNGSTEN CARBIDE TIPPED SAW BLADES



DESCRIPTION DIAM. x TEETH	PART Number	BULK Pack	
7-1/4" x 20	UC-200-720	25	
7-1/4" x 24	UC-210-724	25	
7-1/4" x 24	UC-220-724	25	ULTRA THIN KERF
7-1/4" x 40	UC-230-740	25	



P.O. Box 1740 Ridgeland, MS 39158 driltec.com Catalog #22-2012



PERFORMANCE IN CONCRETE AND STONE